



medical **ECONET**
GERMANY



Welcome to healthcare

Content

Fetal

04



ECG

08



Monitoring

12



Lab

19



Emergency

20



E.S.U.

22



BDM

23



The roots of medical Econet GmbH long back to the year 1997. As European headquarter of company "Kretz Technik AG, Zipf / Austria, our office was located in Dorsten, on the edge of the River - Ruhr-Area.

In present days we are an independent company and have established ourselves as a qualified manufacturer and supplier of medical products, successful in national and international sales. In February 2013, we moved our headquarters to a new, modern building complex in Oberhausen / NRW.

With our high quality and innovative medical devices, medical Econet GmbH recorded a steadily increasing demand in Germany, Europe and many other regions around the world.

Medical supply specialists, hospitals, clinics, midwives, therapists and many other therapeutically active groups rely on our experience and our professionalism.

Our aim is to constantly extend and improve our product range of diagnostic devices and imaging systems. The needs and wishes of our customers we always raise perceived as inspiration for new developments and implemented successfully for many years.

Fetal



Economic and versatile
Fetal Monitor

Insight Lite

- Large 7 - segment LED
- High sensitive 9 crystals 2 Mhz transducer
- Dual fetal movement and heart rate
- Internal thermal printer (114 mm wide)
- Printing speed: 10, 20, 30 mm / min
- 360° visible alarm lamp
- Heart rate display
- Serial interface RS - 232
- Built-in rechargeable Li - ion battery
- Incl. waterproof probes, event marker, belts, gel and paper
- Dimensions: 245 x 175 x 145 mm

Insight Lite - Fetal Monitor
Article No. 35.51-9001



Premium and compact
Fetal Monitor

Insight

- 7" wide TFT color LCD monitor
- High sensitive 9 crystals 2 MHz transducer
- Dual fetal movement and heart rate
- 24 hours trend saving time
- Printing speed: 10, 20, 30 mm / min
- 360° visual alarm lamp
- Internal thermal printer
- Built - in rechargeable Li - ion battery
- Incl. waterproof probes, event marker, belts, gel and paper
- Fetal ECG function (optional)

Insight - Fetal Monitor
Article No. 35.51-9000



ECOtwin LED

ECOtwin LCD / LED

Modernized user - friendly
antepartum fetal monitor

ECOtwin LED
Article-No. 35.71-3450

ECOtwin LCD
Article-No. 35.71-3470

- 7" wide TFT color LCD monitor (800x480) or 7-segment large numeric LED: LED type
- Easy data transfer onto USB stick
- 450 hours patient data saving
- High sensitive 9 elements 0.985 MHz transducers
- Waterproof probes
- Built-in battery and printer
- Networkable with PC (RS-232 or optional Bluetooth)
- Including waterproof probes, event maker, belts, IPX8, gel and paper



ECOsound

Easy to use pocket size
fetal doppler with
waterproof probe

ECOsound WP
Article-No. 35.71-2600

- Large LCD for heart rate and battery status
- Ultra sensitive 2MHz transducer
- Built in loudspeaker
- Audio output - jack for earphone
- Active noise reduction to optimize signal quality
- Auto shut off to prolong battery life (AA 1,5 V x 2)

Mobile
stand

Waterproof probes IPX7
Insight Lite / Insight

Durable connectors
Insight Lite/ Insight

Dimensions
Insight Lite/ Insight

Probes for ECotwin

Bag for ECotwin

Bag for ECosound

CTG belts





Smart 1

Single Fetal Monitor

- High sensitive US probe, external UC measurement
- LED display
- Large print - out
- Incl. 1 US probe with 9 crystals and 1 Mhz, 1 Toco probe, event marker, CTTG belts, 2 rolls of paper, ultrasound gel, power supply, user's manual
- (Paper - 21,5 cm x 30 m / 45 mm diameter)

Smart 1

Article No. 35.11-7000



Smart 3

Twin Fetal Monitor

- HR 1 and HR 2 as well as uterine contraction (external monitoring)
- Separate recording of fetal movement
- Integrated CTTG analysis
- Adjustable Printing speed: 10, 20, or 30 mm / min
- Grid function for using fax paper
- 12 hours of data storage
- Documentation of data on print out
- Incl. 2 US probes with 9 crystals and 1 Mhz, 1 Toco probe, event marker, CTTG belts, 2 rolls of paper, ultrasound gel, power supply, manual

Smart 3

Article No. 35.11-1400

Probes



CTTG analysis

Dimensions

FC Central Software

Color display

Battery



ECG



Cardio M Plus

12-, 6- and 3 - Channel ECG measurement
in one device with Touch Screen Display
and interpretation

Free ECG Software
to download

Cardio M Plus
Article No. 30.11-3600

- Large size color display, displaying all 12 channels simultaneously
- Easy to use with touchscreen
- 12, 6 or 3 - channel printout selectable
- Automatic or manual ECG
- Built-in memory for up to 120 ECGs
- Recommendation for interpretation and measurement of all 12 channels
- Clear print out on A4 size paper
- Battery (optional)
- Incl. ECG accessories



Cardio M

12-, 6- and 3 - Channel ECG
with interpretation

Free ECG Software
to download

Cardio M
Article No. 30.11-2200

- 12 - channel resting ECG
- Time saving towards 3 - and 6 - channel ECGs
- Manual ECG recording or 10 sec. ECG for interpretation
- Records 12 channels simultaneously or in packages (2 x 6, 3 x 4)
- Clear print - out
- Rhythm print - out (by 6 or 3 channels)
- Automatic interpretation recommendation
- Grid - function to use fax paper
- Incl. accessories



Same as Cardio M Plus,
however including Spirometer

Spirometer SPM 300
Article No. 30.11-3600 + 30.10-3100

Spirometer SPM 300 for Cardio M Plus

- Graphical description and print-out of flow - volume - curve
- Measurement parameters:
FVC, FEV 1.0, FEF 25 - 75 %, FEF 200 - 1200 ml, FEF 50 %, FIF 50 %, PIF, FET 100 %, SVC

- Measurements based on ATS criteria
- Large print - out and easy archiving
- Incl. 100 Mouthpieces
- Incl. ECG accessories

Interpretation


Standard accessories for
Cardio M / M Plus

Battery

Standard accessories for
Cardio M / M Plus

Suction unit (optional)

Dimensions



The most modern combination of microelectronics and supreme ECG software.

Cardio M-PC is an ideal module to record and analyze recorded ECGs. It meets all the requirements of modern PC technology.

Integrated USB port enables a simple connection and mobile use along with a notebook PC.

Cardio M - PC resting ECG
Article No. 30.90-9500

Cardio M - PC net
Article No. 30.90-9501

Cardio M - PC ergometry
Article No. 30.90-9501

- 12-Channel ECG, Einthoven, Goldberger, Frank, Nehb
- Interval- (8 / 16 / 32 sec) and continuous ECG recording
- ECG presentation and comparison
- Automatic measurement and interpretation using Mortara-Rangoni Algorithm
- Heart-Rate-Variability (HRV) arrhythmia detection
- 2D / 3D vector
- Emergency ECG
- Network for up to 256 working stations (option)
- Expandable with spirometry, holter NIBP, holter ECG
- GDT / HL7 interface




Physio Quant is an ambulatory blood pressure system with high accuracy and fast data collection of each blood pressure value. Reliable, with elimination of motion artifacts. The analysis software is comfortable and easy to use. It offers various analysis and views of the display. The installation can be done through a PC or PC - network.


Article No. 40.20-3150

- Physio Quant ambulatory blood pressure system
- Cuff for adult
- Bag with a strap
- PC connection cable
- Software CD
- Batteries (2 pcs.)
- Battery charger

ME Diagnose Center




Patient file



Start screen



Resting ECG



ECG vector



Stress ECG



Laptop optional



Cardio Trak Holter - ECG

- Sampling rate 10.000Hz
- Patented automatic analysis
- Power saving - 1 x AAA battery for up to 96h recording time
- Light weight - 63g
- Automatic pacemaker detection
- Complete data transmission within 10 seconds
- LCD Display for monitoring the electrode application

Cardio Trak Holter ECG
Article No 30.90-9450A



Spiro M PC

For diagnostic analysis of pulmonary function, including COPD and asthma. Measurement of VC, FVC as well as MVV and pre - / post measurements. Comfortable analysis software with integrated assistance function and children animation.

Spiro M PC
Article No 40.20-3140

- Direct quality control of FVC curves
- Integrated management system for decision - making for best FVC curve
- Anatomic animation of possible disease
- Automatic internal calibration (optional external calibration with pump)
- Integrated GDT interface
- Plug & Play USB connection
- Communication with patient through human voice (English)
- Pharmaceutical test-subsystem
- Secure and cost - effective disinfection of sensor with InstruMed disinfectant
- Used algorithms:
Knudson, E.R.S. , Crapo & Bass / Zapletal etc.

Monitoring



Compact 3

Extremely small and light and therefore perfectly fits for mobile use, hospital or nursing home

Compact 3
Article No. 20.11-52005

- High contrast TFT - display with SpO2, NIBP, temperature (optional), EtCO2 (optional)
- Operated through external power supply or vehicle electrical system
- Li - ion battery operation for up to 5 hours
- Trend memory for up to 128 hours
- Alarm memory for 20 alarms with 10 sec. each
- Integrated connector sockets for network and USB
- Incl. SpO2 sensor blood pressure cuff for adult
- Weighs only 1 kg
- Incl. accessories
- L 190 x H 125 x W 60 mm



Compact 5

Including Suntech module and printer

7" TFT screen and a resolution of 800 x 600 pixel with connection to an external VGA monitor (optional)

Compact 5
Article No. 20.11-57005

- Measures NIBP, ECG, pulse rate, respiration, SpO2, temperature (optional)
- ST - segment analysis
- ECG wave 1 channel
- Alarm for all parameters
- Transportable weight 4,5 kg
- Incl. accessories
- L 238 x H 175 x D 155 mm
- Languages: Bulgarian, Czech, English, French, German, Hungarian, Italian, Polish, Portugese, Romanian, Russian, Spanish, Turkish

EtCO2 module optional
Compact 3 / 7 / 9

SpO2 sensor and
adaptor cable

NIBP cuff

Dimensions

Emergency bag

Incl. printer

Wall mount adaptor

Dimensions





Compact 7

Including Suntech module and printer

Wide screen 10,4" TFT color display with 800 x 600 pixel, additional VGA output for an external Monitor, IBP and EtCO2 measurement (optional)

Compact 7
Article No. 20.11-5900S

- Measures NIBP, ECG, pulse rate, respiration, SpO2, temperature (optional), IBP (optional), EtCO2 (optional)
- Alarm function for all parameters
- Including printer (printable parameters are selectable)
- With training-mode
- Displays up to 7 waves
- Ideal for transport - weight ca.: 4,5 kgs
- Incl. accessories
- L 270 x H 184 x W 250 mm
- Languages: Bulgarian, Czech, English, French, German, Hungarian, Italian, Polish, Portugese, Romanian, Russian, Spanish, Turkish



Compact 9

Including Suntech module and printer
12,1" TFT Touch screen
with 800 x 600 Pixel,
add. VGA output monitor
IBP and EtCO2
(optional)

Compact 9
Article No. 20.11-6000S

- NIBP, ECG, pulse rate, respiration, SpO2, temperature (optional) IBP (optional), EtCO2 with EtCO2 module (optional)
- Alarm for all parameters
- With training mode
- Display up to 6 waves
- Incl. accessories
- 168 hours trend memory
- Languages:
Bulgarian, Czech, English, French, German, Greek, Hungarian, Italian, Polish, Portugese, Romanian, Russian, Spanish, Turkish

Available for all Compact Monitors
Lite Central Software included

- For simultaneous display of all parameters with 2 Compact monitors on 1 PC
- Remote control of patient monitors
- PC: Windows XP or 7 Professional or 8, Intel Pentium 4 processor, 256 MB RAM, 17" - Monitor and VGA graphic card with 36 MB resolution or better. Min. 1280 x 1024 pixel,

- LAN - card with fixed IP address, HUB (8 beds: 12 ports, 16 beds: H 24 ports necessary) min 40 MB hard disc memory, min. 16 BIT sound card,
- CD - driver and speaker
- WLAN (optional)
- Medical PC, monitor and other hardware is not included

NIBP cuff

Battery

Dimensions


Incl. printer

EtCO2 module optional
Compact 3 / 7 / 9

Drug calculations

Touch screen

Dimensions



Mobile Stand for Patient Monitors Compact 5/ 7/ 9

This mobile stand is especially designed for Compact series patient monitors. With its tilt-proof 5-foot frame and lockable casters the height can be easily adjusted. Equipped with a basket where the accessory items can be stored.

Article No. 21.10-5041

Mobile stand for patient monitors



Adjustable height
 80cm - 125cm

Compact 5


Compact 7

Compact 9



Wireless Network

Central Monitoring System

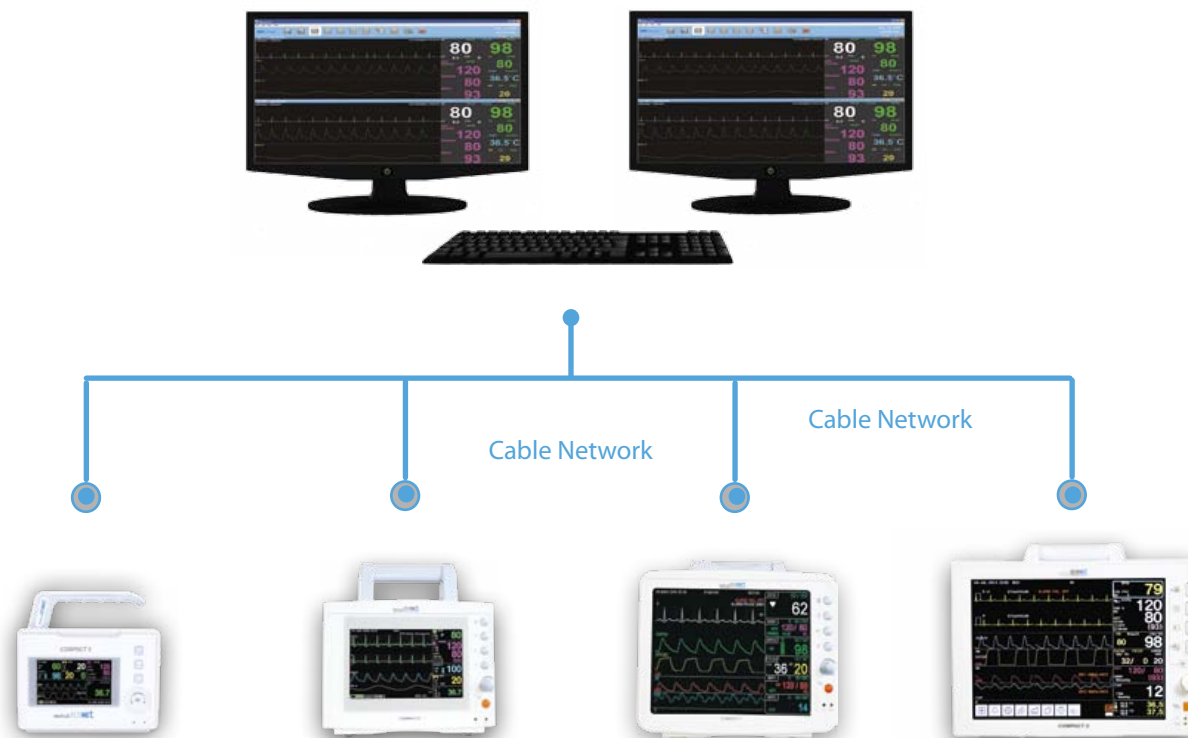

Cable Network

Cable Network



Article No. 21.10-5750

The Central Monitoring System supports centralized monitoring environments through wired or wireless networking capabilities and allows the user to monitor up to 32 patients simultaneously from one location.

Central software

Central software

WLAN





PalmCare Plus
Article No. 40.50-2220

Pulse oximeter

Pulse Oximeter PalmCare Plus

- SpO2, heart rate, pulse wave,
- Alarm levels, signal quality
- 2,8" color LCD screen
- Available for adult, pediatric and neonate
- 72 hours trend saving time
- Built-in rechargeable Li-ion battery with up to 2 hours of operation (4 h battery optional)
- Audible alarm with adjustable alarm levels
- English, German, Spanish, French, Italian



ME 5 Pulse Oximeter
Article No. 40.20-5206

ME 5 Pulse Oximeter

- Spot check measurements of patients (>25kgs)
- Digital display of pulse, SpO2 and signal quality
- Measurement range of SpO2: 70 - 100 %
- Pulse: 30 - 235 BPM
- Incl. bag, neck string and batteries
- L 58 x W 32 x H 34 mm

ME 10 Pulse Oximeter

- Efficient, digital SpO2 finger pulse oximeter with pulse waveform for spot-check measurements of patients (>25 kgs)
- Switchable display in 6 different positions
 - Color and numeric display of SpO2, perfusion index, plethysmography
 - Weighs only 50g (including batteries)
 - Measurement range of SpO2: 70 - 100 %
 - Pulse rate: 30 - 235 BPM
 - Including bag, neck string, 2 AAA batteries and user's manual
 - L 60 x W 34 x H 30 mm

ME 10 Finger Pulse Oximeter
Article No. 40.20-5205



ECOspin III is a compact table-top centrifuge which is designed for separation of urine, serum and plasma. Equipped with a 12-fold fixed angle rotor for max. 15ml test tubes and 4500 rpm, ECOspin III is an ideal appliance for doctor's practice. ECOspin III is convenient in operation through direct entry of time and speed using hygienic keypad. Its durable body makes cleaning and disinfection easier than ever. For a safe use, the lid is locked by electro-magnetic technology during the operation.

ECOspin III
Article No. 60.60-9010

ECOspin III

- 12-fold fixed angle rotor for 15ml tubes
- Brushless motor with electronic speed control 300-4500 rpm
- Digital adjustment of operating time and rotating speed
- Hygienic membrane keyboard
- Electro-magnetic lid lock
- Tough, easy-to-clean plastic case
- 255(L) x 245(W) x 140(H)mm
- Weight ca. 6 kg

Emergency



Wall mount adaptor



Wall cabinet



Bag



ME PAD Trainer

Semi-Automatic ME PAD & Fully Automatic ME PAD

ME PAD is a defibrillator to help during sudden cardiac attack. Quickly applied ME PAD can save lives and can be used in any places. The user gets all the necessary assistance as a voice instruction whereas voice volume is automatically adjusted to the ambient noise. Up to five operations of three hours of duration can be recorded on the internal SD memory card. Any time all the important data such as heart rhythm, energy output, time, etc. are available for the post-analysis. In addition to the automatic power switch while using children pads, the output can be lowered manually.

Children can be treated in emergency cases even if pediatric electrodes are not available. In daily, weekly and monthly intervals a test program is performed.

All functions including battery performance and durability of the electrodes are automatically checked, an alarm will be given in case of errors.

The software of ME PAD is programmed according to the current guidelines of the ERC, the user is instructed through the entire resuscitation.

The long-life Li-ion battery guarantees a standby time of up to five years or up to 200 shocks at full power.

Fully-Automatic ME PAD



Semi-Automatic ME PAD

ME PAD Fully Automatic 30.10-4600

ME PAD Semi-Automatic 30.10-4300

ME PAD Trainer 31.10-4310

Wall cabinet with alarm ME PAD 31.10-4304

Wall mount adapter ME PAD 31.10-4305

Electrode adult ME PAD 31.10-4302A

Lithium Battery ME PAD 31.10-4301B

Bag ME PAD 31.10-4303

Electrode children ME PAD 31.10-4306C



ECOTom 80

ECOTom 80 offers various functions with its compact design – Cut (Pure and Blend), Contact and Bipolar Coagulation.

REM monitors the size of contact area between patient and pad and gives an alarm if the size is inappropriate. The danger of burning incidents is reduced to its minimum. Fields of applications are: general surgeries, Endoscopy, Vascular surgeries, Gynecology and many more.

- Generator with 80 watt
- Monopolar and bipolar applications
- Stabilized power supply
- Operated by waterproof membrane keyboard
- Bipolar control via footswitch or tweezers
- Neutral plate with feedback control
- Wide range of standard accessories included
- 24 months factory warranty

Power supply	115-230 V AC 50/60 Hz
Power consumption	50/60 Hz / 300 VA ± 10 %
Frequency	400 KHz /
Protection class:	Class I, BF
Dimensions	270 x 310 x 110 mm (B x T x H)

ECOTOM 80 Article No. 60.20-7003

Disposable double
handswitch

Neutral electrode

Double footswitch



ECOTom 200 / 400

ECOTom 200 / 400's powerful technology can satisfy all of surgical demands with convenience, safety and flexibility. ECOTom is one of the lightest models in the market, providing portability, weighing only 12.5 kgs. Having a special Feedback system, ECOTom series fulfill the highest safety standards.

- Generators with 200 and 400 watts are available
- Monopolar and bipolar applications
- Stabilized power supply
- Operated by waterproof membrane keyboard
- Bipolar control via footswitch or tweezers
- Neutral plate with feedback control
- Wide range of standard accessories included
- 24 month factory warranty

Power supply	115-230 V AC 50/60 Hz
Power consumption	50/60 Hz max. 1200 VA ± 10%
Frequency	400 KHz / 500 kHz
Protection class	Class I, Type CF
Dimensions	388 x 410 x 160 mm (B x T x H)

ECOTOM 200 Article No. 60.20-7001
ECOTOM 400 Article No. 60.20-7000

BDM



Case for Sonost 3000
Art. No. 26.99-1033

Sonost 3000

Ultrasound Bone Densitometer

Sonost 3000 offers a fast and easy measurement of bone mineral density on calcaneus (heel bone). It measures the SOS (Spread Of Sound) and BUA (Broadband Attenuation) thus calculating the BQI (Bone Quality Index)

Sonost 3000
Art. No. 25.40-1300

- Short preparation time
- Automatic adjustment of gel pads for optimal foot positioning
- High precision
- High measuring speed (15 sec.)
- Short preparation time
- Integrated Software
- Touch Screen with built - in printer
- USB connection for an external printer (for DIN A4 printout)
- VGA output



Sonost 2000

Ultrasound Bone Densitometer

Sonost 2000 is a compact, cost-effective, solution to estimate the risk of osteoporosis. Sonost 2000 offers a fast, convenient and easy measurement of calcaneus (heel bone)

Sonost 2000
Art No. 25.40-1000

- USB connection to use with external PC
- incl. phantom for calibration, 4x ballon, ultrasound gel, USB - cable and user manual
- High precision
- High reproducibility
- Incl. Software



Technical Support and Service

medical ECONET GmbH works under strict quality management according to DIN EN ISO 13485 and meets the requirements of the highest level of all QM - Systems for companies in the medical technology sector. Our service / repair department meets all the requirements of § 4 of the Medical Devices - Regulation operators.

Tel.: +49 (0) 208 377890-15 or +49 (0) 208 377890-18
E Mail: service@medical-econet.com

Our highly qualified service staff will assist you with action and advice.

Dexxum T blue

DEXA System using Goldstandard of WHO

Bone Densitometer with folding - down
sides and axial DEXA measurement
method

Dexxum T
Art. No. 25.40-3100

- Bone mineral density measured on Spine, Femur and Forearm
- Integrated FRAX calculator
- Body FAT analysis
- Very good reproducibility through high precision
- Automatic determination of ROI (Region Of Interest)
- Laser - controlled positioning
- Intuitive use through user-friendly Software (various languages available)
- Extensive reporting and archiving
- Space - saving
- Including PC, PC-Desk, keyboard and printer

Welcome to healthcare

Oberhausen

51°31'06.61"N

6°49'01.48"E

medical **ECONET**

Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0) 208 377 890-0 info@medical-econet.com

f: +49 (0) 208 377 890-55 www.medical-econet.com

facebook.com/medicaleconetgermany

twitter.com/medicaleconet

distributor

*All specifications are subject to change without notice.